


HIGH INTENSITY LED LIGHT (WHITE)

(HIGH-LED-W120)

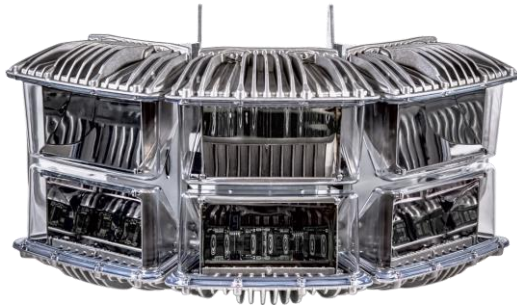

FEATURES

- Serviceable at point of light
- Simple mounting configuration
- All power supplies and control mechanisms located at the bottom of the tower
- All components managed by a Master Controller
- SNMP enabler (option)
- 5 years warranty

SPECIFICATIONS

Light output

Flash color	White
Intensity, day mode	270 000 cd \pm 25%
Intensity, twilight mode	20 000 cd \pm 25%
Intensity, night mode	2 000 cd \pm 25%
Horizontal coverage	120°
Vertical beam	3°
Expected min. lamp life	10 years

Electrical value

Power consumption	280 Watts per Flash head
Power requirements	240 Vac 50/60hz

Mechanical

Flash head weight	27 Kg (60 lbs)
All controllers in Rack Mount	20 Kg (44 lbs)
Flash head dimensions (W x H x D)	865 mm x 416 mm x 320 mm (34" x 16½" x 12½")
Rack Mount (W x H x D)	585 mm x 2200 mm x 800 mm (23" x 87" x 31½")



Others

FAA type	L-856, L-857
Transport Canada type	CL-856, CL-857
Operating temperature	-40°C to 55°C (-40°F to 131°F)
Warranty	5 years

ETL CERTIFIED FOR FAA:

- AC 150/5345-43H

COMPLIANT WITH:

-  Transports Canada Standard 621
-  Transport Canada Standard 621