




Never alone in the dark.

LED Hybrid Beacon (Day/Night)

LED-B-HYBRID

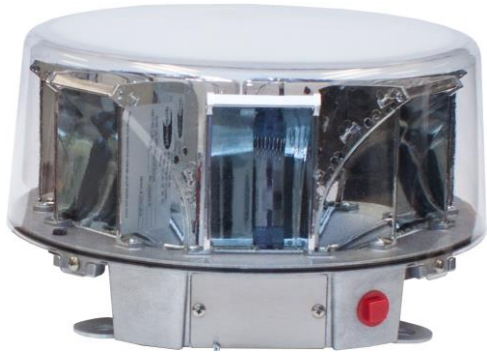

FEATURES

- Optical design to reduce ground disturbance
- 10-year durability
- Very stable light output under voltage variations
- Standard 13 1/4" bolt circle
- Controller and power supply are located in a separate box, outside the light unit.
- Robust lightning protection (class 1, 2 and 3).
- IR equipped.

SPECIFICATIONS

Light output

Lamp type	LED
Light color	White and red
Effective intensity	20K day, 2K night cd; ±25%. Infrared: >264mW/sr @840nm
Horizontal coverage	360°
Vertical beam	3°
Expected min. lamp life	10 years +

Electrical value

Power consumption	60 W day / 20 W night
Power requirements	120/240 Vac 50/60hz 24/48/-48 Vdc nominal (±20V to ±60V)


Mechanical

Beacon weight	8 Kg (18 lbs)
Beacon dimensions (dia. x height)	48,1 cm x 35.5 cm (19" x 14")
Controller weight	11.3 Kg (25 lbs)
Controller dimensions (width x height x depth)	381mm x 444mm x 211mm (15" x 17.5" x 8.3")

Others

FAA type	L-865 / L-864
Transport Canada type	CL-865 / CL-864
Configurable for Catenary	L-866-885 / CL-866-885
Operating temperature	-40°C to 55°C (-40°F to 131°F)
Warranty	5 years

COMPLIANT

-  Transports Canada Transport Canada Standard 621
- Conformidad con las normas de Mexico
- ICAO - Medium Type A & B
- CE

CERTIFIED

- ETL certified for FAA AC 150/5345-43J
- CSA / UL