




Never alone in the dark.

LED DOUBLE OBSTRUCTION LIGHT

OL2B-LED120-2

OL2B-LED48-2

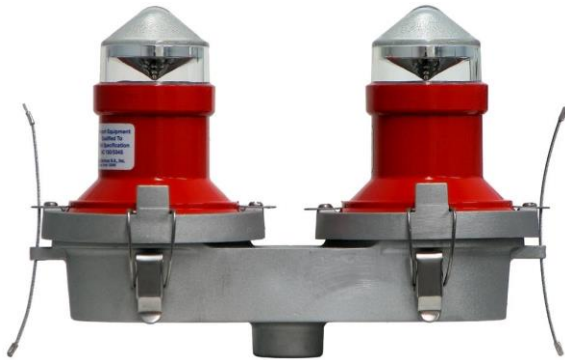

FEATURES

- Highly resistant glass construction
- Reduced energy consumption by 96% versus incandescent
- 10 years durability
- Very stable light output under voltage variations
- Also available with IR

SPECIFICATIONS

Light output

Lamp type	LED
Effective candelas	32.5 min.
Horizontal coverage	360°
Vertical beam	>10°
Expected min. lamp life	10 years

Electrical value

Power consumption	8 Watts
Current at 120Vac	0.12 A (rms)
Power requirements	120 Vac or 240 Vac 50/60hz or 12-48 Vdc


Mechanical

Weight	3 Kg (7 lbs)
Dimensions (W x H x D)	350mm x 300mm x 120mm (13¾" x 12" x 4¾").
Hub sizes	¾" or 1" NPT
Lenses material	Pyrex glass
Base material	Aluminum

Others

FAA type	L-810
Transport Canada type	CL-810
Operating temperature	-55°C to 55°C (-67°F to 131°F)
Warranty	5 years

COMPLIANT

-  Transports Canada Transport Canada Standard 621

CERTIFIED

- ETL Certified for FAA AC 150/5345-43J